



Single Component 6 / 10 oz. Cartridge

## 21001 – Wexford II



- Standard 10.3 oz. Cartridge
- Mechanical Advantage 7:1
- Retractable Seal Puncturing Device
- Injection Mold, Nylon-Fiberglass
- Hex Drive Rod
- Built-in Ladder Hook
- Steel Catch Plate
- D-I-Y and Professional Model



## 41001 – Wexford

41001-R

- Standard 10.3 oz. Cartridge
- Mechanical Advantage 7:1
- Wear Compensating Device
- Retractable Seal Puncturing Device
- Corrosion Resistant Epoxy Finish
- Hex Drive Rod
- Built-in Ladder Hook
- Steel Catch Plate
- D-I-Y, Professional and Industrial Model
- Reinforced Front End Version Available - Model 41001-R



## 41004 – Chilton



- Standard 10.3 oz. Cartridge
- Mechanical Advantage 12:1
- Switchable Flow Control
- Seal Puncture Device
- Wear Compensating Device
- Built-in Ladder Hook
- High Volume Usage
- Catch Plate – Sintered Steel
- Barrel Turns – Application Around Corners
- Low-Medium Viscosity Materials
- Thumb Activated Instant Pressure Release
- All Component Replaceable Parts
- Available Without Switchable Flow Control – Model 41004-M/1



## 41004-XT – Chilton Extra Thrust



- Standard 10.3 oz. Cartridge
- Mechanical Advantage 18:1
- Switchable Flow Control
- Seal Puncture Device
- Wear Compensating Device
- Built-in Ladder Hook
- Catch Plate – Sintered Steel
- Barrel Turns – Application Around Corners
- Medium-High Viscosity Materials
- Thumb Activated Instant Pressure Release
- Professional, Industrial and Auto After-Market Use
- All Component Replaceable Parts
- Available Without Switchable Flow Control – Model 41004-XTM/1



## 41004-2T – Ascot



- Standard 10.3 oz. Cartridge
- Mechanical Advantage 26:1
- Wear Compensating Device
- Support Straps – Secure Cartridge Fit
- Built-in Ladder Hook
- Catch Plate – Sintered Steel
- Barrel Turns – Application Around Corners
- High Viscosity Materials
- Thumb Activated Instant Pressure Release
- Professional, Industrial and Auto After-Market Use
- All Component Replaceable Parts

## 41007 – Selby



- 6 oz. Semco® & Semkit® Cartridge Systems
- Bayonet Lock on Retainer
- Mechanical Advantage 12:1
- Switchable Flow Control
- Wear Compensating Device
- Built-in Ladder Hook
- Catch Plate – Sintered Steel
- Thumb Activated Instant Pressure Release
- All Component Replaceable Parts

## 63001 - Bexley 61001 - Tyne



- Standard 10.3 oz. Cartridge
- Series 3 Air System - Model 63001
- Series 2 Air System - Model 61001
- Air Action on Cartridge Plunger
- Drawn Aluminum Barrel
- True Adjustable Air Regulator - 75 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- All Component Replaceable Parts
- Rotating Air Hose Connector Included



## 63004-LP - Whitley 61004-LP - Tamar



- Standard 10.3 oz. Cartridge and 10 oz. Sausage
- Series 3 Air System - Model 63004-LP
- Series 2 Air System - Model 61004-LP
- Pre-Configured for Cartridge Application
- Plunger Included for Sausage Application
- Piston Rod Action on Cartridge Plunger or Sausage
- Plunger Extension - Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- True Adjustable Air Regulator - 100 PSI Maximum Output
- 145 PSI Maximum Input
- All Component Replaceable Parts
- Rotating Air Hose Connector and Six White Cone Nozzles Included



## 63004-HP - Whitley HP



- 10 oz. Cartridge/Sausage Version - Model 63004-300HP
- Pre-Configured for Cartridge Application - Sausage Plunger Included
- 20 oz. Sausage Version - Model 63004-600HP
- Pre-Configured for Sausage Application - Cartridge Plunger Included
- Series 1 Air System Also Available
- High Power - 484 lbs. Nominal Thrust
- Plunger Extension - Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- True Adjustable Air Regulator - 100 PSI Maximum Output
- 145 PSI Maximum Input
- All Component Replaceable Parts
- Rotating Air Hose Connector and Six White Cone Nozzles Included



## 82010-L - Volten 300 Light



- Standard 10.3 oz. Cartridge
- Powered by 12 Volt Lithium Ion Battery Pack
- Maximum Force 475 lbs.
- Variable Speed Control
- One-Hour Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #82001-L
- Charger Part #82002-L



## 83010 - Bradford 300



- Standard 10.3 oz. Cartridge
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



Single Component

10 oz. Cartridge



- Standard 29 oz. Cartridge
- Mechanical Advantage 12:1
- Switchable Flow Control
- Seal Puncture Device
- Wear Compensating Device
- Built-in Ladder Hook
- Catch Plate – Sintered Steel
- Barrel Turns – Application Around Corners
- Low-Medium Viscosity Materials
- Thumb Activated Instant Pressure Release
- High Volume Usage
- All Component Replaceable Parts
- Available With 18:1 Mechanical Advantage – Model 41002-XT
- Available with 26:1 Mechanical Advantage – Model 41002-2T
- Available Without Switchable Flow Control – Model 41002-M/1



- Standard 29 oz. Cartridge
- Series 3 Air System – Model 63002
- Series 2 Air System – Model 61002
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Piston Rod Action on Cartridge Plunger
- True Adjustable Air Regulator - 100 PSI Maximum Output
- 145 PSI Maximum Input
- Front Plate Flips Up for Cartridge Installation
- All Component Replaceable Parts
- Rotating Air Hose Connector Included

Series 3

Series 2



## 63002-UP - Berkshire Upright 61002-UP - Jumbo Air Upright



Series 2

Series 3

- Standard 29 oz. Cartridge
- Series 3 Air System – Model 63002-UP
- Series 2 Air System – Model 61002-UP
- 45" Long with Joist Guide Attached
- Reduces Bending and Reaching
- Front Plate Flips Up for Cartridge Installation
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Piston Rod Action on Cartridge Plunger
- True Adjustable Air Regulator - 100 PSI Maximum Output
- 145 PSI Maximum Input
- All Component Replaceable Parts
- Rotating Air Hose Connector Included



## 82029-L - Volten Quart Light



- Standard 29 oz. Cartridge
- Powered by 12 Volt Lithium Ion Battery Pack
- Maximum Force 475 lbs.
- Variable Speed Control
- One-Hour Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #82001-L
- Charger Part #82002-L



## 83029 - Bradford Quart



- Standard 29 oz. Cartridge
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



## 51000 – Avon 300



- Standard 10 oz. Sausage and 10.3 oz. Cartridge
- Pre-Configured for Sausage Application
- Plunger Included for Cartridge Application
- Mechanical Advantage 12:1
- Switchable Flow Control
- Plunger Extension – Reduces Waste
- Wear Compensating Device
- Drawn Aluminum Barrel
- Interchangeable Pull Handle
- Quick Release End Cap
- All Component Replaceable Parts
- Includes Six White Cone Nozzles, Spare Sausage Plunger, Ladder Hook and Spanner Wrench
- Available with Clear Plastic Barrel – Model 51000-C
- Available with Hook Rod – Model 51000-H
- Available with Clear Plastic Barrel and Hook Rod – Model 51000-CH
- Available with 18:1 Mechanical Advantage – All Variants
- 400 ml. Version Available - Model 51000-400
- Available Without Switchable Flow Control – Model 51000-M



## 31001-600 – Prescott 600



- 10 oz. / 20 oz. Sausage and 10.3 oz. Cartridge
- Pre-Configured for Sausage Application
- Plungers Included for Cartridge
- Mechanical Advantage 10:1
- Plastic Barrel & Handle – Lightweight and Ergonomic
- Built-In Ladder Hook
- Quick Release End Cap
- Includes Six White Cone Nozzles
- All Component Replaceable Parts



## 51001 – Avon 600



- 10 oz. / 20 oz. Sausage, 10.3 oz. Cartridge and Bulk Application
- Pre-Configured for Sausage Application
- Plungers Included for Cartridge and Bulk (G2) Applications
- Mechanical Advantage 12:1
- Switchable Flow Control
- Plunger Extension – Reduces Waste
- Wear Compensating Device
- Drawn Aluminum Barrel
- Interchangeable Pull Handle
- Quick Release End Cap
- All Component Replaceable Parts
- Includes Six Yellow Cone Nozzles, Ladder Hook and Spanner Wrench
- Available with Clear Plastic Barrel – Model 51001-C
- Available with Hook Rod – Model 51001-H
- Available with Clear Plastic Barrel and Hook Rod – Model 51001-CH
- Available with 18:1 Mechanical Advantage – All Variants (add XT to end of model number)
- Available Without Switchable Flow Control – Model 51001-M



## 51001-2T – Ascot 600



- 10 oz. / 20 oz. Sausage, 10.3 oz. Cartridge and Bulk Application
- Pre-configured for Sausage Application
- Plungers Included for Cartridge and Bulk (G2) Applications (Bulk on 20 oz. Only)
- Mechanical Advantage 26:1
- Plunger Extension – Reduces Waste
- Drawn Aluminum Barrel
- Interchangeable Pull Handle
- Quick Release End Cap
- All Component Replaceable Parts
- Includes Six Yellow Cone Nozzles, Ladder Hook and Spanner Wrench
- 10 oz. Version Available – Model 51000-2T



## 51001-1000M – Avon 1000M



- 34 oz. Sausage
- 3M® Cap Included for Loop Sealant Application
- Mechanical Advantage 12:1
- Switchable Flow Control
- Plunger Extension – Reduces Waste
- Wear Compensation Device
- Drawn Aluminum Barrel
- Interchangeable Pull Handle
- All Component Replaceable Parts



Single Component Sausage / Bulk



## 63003 - Carlisle



- 10 oz. Sausage, 20 oz. Sausage and 10.3 oz. Cartridge
- Pre-Configured for Sausage Application
- Rod & Plunger included for Cartridge Application
- Floating Plunger Action with Interchangeable System from Sausage to Cartridge
- Plunger Extension - Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- True Adjustable Air Regulator - 100 PSI Maximum Output
- 145 Maximum Input
- All Component Replaceable Parts
- Air Hose Connector and Six White Cone Nozzles Included

## 63006 - Fenwick 61006 - Trent




Series 3

Series 2



- 10 oz. Sausage Version - Model 63006-300
- 20 oz. Sausage Version - Model 63006-600
- 400 ml. Sausage Version - Model 63006-400
- Series 3 Air System - Model 63006
- Series 2 Air System Also Available
- Plunger Extension - Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Floating Plunger Action with Secure Cord
- True Adjustable Air Regulator - 100 PSI Maximum Output (300/400ml.)
- 125 PSI Maximum Output (600ml.)
- 145 PSI Maximum Input
- Silencer
- Quick Release End Cap
- All Component Replaceable Parts
- Rotating Air Hose Connector and Six White Cone Nozzles Included
- Variants Available with Handle Positioned at Front (Model 63006-600/M) or Rear (Model 63006-600/M1) of Applicator
- High Pressure 600ml. Version Available - Model 63006-600HP

## 63006-600/F - Fenwick Spreader

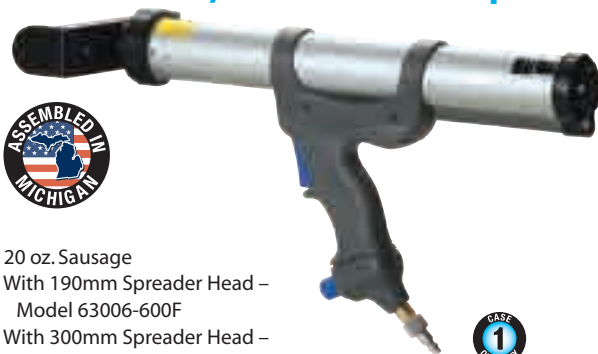

- 20 oz. Sausage
- With 190mm Spreader Head - Model 63006-600F
- With 300mm Spreader Head - Model 63006-600F/1
- With 400mm Spreader Head - Model 63006-600F/2
- Plunger Extension - Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Floating Plunger Action with Secure Cord
- True Adjustable Air Regulator - 125 PSI Maximum Output
- 145 Maximum Input
- Silencer
- Quick Release End Cap
- All Component Replaceable Parts
- Rotating Air Hose Connector Included

## 61006-1000 – Wilton 1000



- 34 oz. Sausage
- 3M® Cap Included for Loop Sealant Application
- Floating Plunger Action with Secure Cord
- Plunger Extension – Reduces Waste
- Drawn Aluminum Barrel
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 Maximum Input
- All Component Replaceable Parts



## 82600-L – Volten 600 Light



- 10 oz./20 oz. Sausage Packs
- Powered by 12 Volt Lithium Ion Battery Pack
- Maximum Force 475 lbs.
- Variable Speed Control
- One-Hour Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Includes Six White Cone Nozzles
- Battery Part #82001-L
- Charger Part #82002-L
- Clear Plastic Barrel Version Available – Model 82600-LC



## 83600 – Bradford 600



- 10 oz./20 oz. Sausage Packs
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Includes Six White Cone Nozzles
- Battery Part #83001
- Charger Part #83002
- Clear Plastic Barrel Version Available – Model 83600-C



## 41009 – Barnet

- 34 oz. Cartridge
- Mechanical Advantage 12:1
- Switchable Flow Control
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Thumb Activated Instant Pressure Release
- All Component Replaceable Parts



Single Component Sausage / Cartridge

51002

## 51002 – Portland

51002/2SC

- 20 oz. Bulk Application – Model 51002-600
- 34 oz. Bulk Application – Model 51002-1000
- 56 oz. Bulk Application – Model 51002-1600
- All Sizes Available with Plastic 2-Start Cap:
  - 20 oz. Bulk Application – Model 51002-600/2SC
  - 27 oz. Bulk Application – Model 51002-800/2SC
  - 34 oz. Bulk Application – Model 51002-1000/2SC
  - 56 oz. Bulk Application – Model 51002-1600/2SC
- Leather Plunger Assembly
- Switchable Flow Control
- Mechanical Advantage 12:1
- Wear Compensating Device
- Drawn Aluminum Barrel
- Interchangeable Pull Handle
- Quarter Turn Steel End Cap or Quick Release Plastic Cap (depending on version)
- All Component Replaceable Parts
- Includes Six Yellow Cone Nozzles and Spanner Wrench
- Available with 18:1 Mechanical Advantage – All Variants (add XT to end of model number)
- Available Without Switchable Flow Control



## 51003-1400 – Preston

- 48 oz. Bulk Application
- 2.5" Drawn Aluminum Barrel
- Plastic (G2) Plunger Assembly
- Switchable Flow Control
- Mechanical Advantage 12:1
- Wear Compensating Device
- Interchangeable Pull Handle
- Quick Release End Cap
- All Component Replaceable Parts
- Includes Six Yellow Cone Nozzles, Plastic Ladder Hook and Spanner Wrench
- Available Without Switchable Flow Control



## 61009 – Bulk Air

- 24 oz. Bulk Application
- Drawn Aluminum Barrel
- Instant Dump Valve
- Quick Release End Cap
- Piston Rod Action on Bulk Material
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Leather Plunger Assembly
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector and Six Yellow Cone Nozzles Included



## 63009-1400 – Oxford

- 48 oz. Bulk Application
- 2.5" Drawn Aluminum Barrel
- Plastic (G2) Plunger Assembly
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Reverse Air – Plunger Return with Trigger
- Instant Dump Valve
- Silencer
- Quick Release End Cap
- All Component Replaceable Parts
- Air Hose Connector and Six Yellow Cone Nozzles Included



Single Component Bulk

35%™

## 63007 - Ashford



- 10 oz. Sausage Version – Model 63007-300S
- 10 oz. Cartridge Version – Model 63007-300C
- 10 oz. Cartridge/Sausage Kit Version - Model 63007-300
- 20 oz. Sausage Version – Model 63007-600S
- Spray and Bead Application
- Dual Flow Controls Regulate Incoming Air Flow and Pattern of Spray
- Floating Plunger Action with Secure Cord
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Silencer
- All Component Replaceable Parts
- 5 Outer Nozzles, 5 Inner Sausage Nozzles, 5 Inner Aluminum Cartridge Nozzles, 5 Inner Plastic Cartridge Nozzles and Air Hose Connector Included (inner nozzles included depends on variant)



*Single Component*



## 82600-LB - Volten 600 Bulk Light



- 20 oz. Bulk
- Powered by 12 Volt Lithium Ion Battery Pack
- Maximum Force 475 lbs.
- Variable Speed Control
- One-Hour Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Includes Six Yellow Cone Nozzles
- Battery Part #82001-L
- Charger Part #82002-L
- Clear Plastic Barrel Version Available – Model 82600-BLC



## 83600-B - Bradford 600 Bulk



- 20 oz. Bulk
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Includes Six Yellow Cone Nozzles
- Battery Part #83001
- Charger Part #83002



## 41006 - Tuck Point



- 1 Quart Capacity Tube
- Mechanical Advantage 12:1
- Switchable Flow Control
- Wear Compensating Device
- Trowel or Pour Material into Tube for Dispensing
- Rubber Plunger Between Steel Plates
- Interchangeable Pull Handle
- Patented Catch Plate (Sintered Steel)
- Barrel Turns – Application Around Corners
- Thumb Activated Instant Pressure Release
- All Component Replaceable Parts
- Tuck Point Nozzle, Grout Nozzle, Tube and Turbine Mixer Included
- Available Without Switchable Flow Control – Model 41006-M



**Bulk / Sausage / Cartridge**

## M25



- 25 ml. x 25 ml.
- Dedicated Mix Ratio 1:1
- Mechanical Advantage 11:1
- Easy Loading Breech – Secure Fit
- Full Cartridge Support



## MP25



- 50 ml. Cartridge Systems
- Square Back Cartridges
- Multi-Ratio Conversions 1:1, 2:1, 4:1 & 10:1 (Must Specify)
- Full Kit Version Available
- Lightweight and Powerful
- Easy Loading Breech – Secure Fit
- Rigid Glass Reinforced Nylon Engineered Plastic



## MR50 / MR25



- 50 ml. Cartridge Systems
- Individual Ratios or Full Kit Options are Available (must specify)
- Round Back Cartridges – MR50 Series
- Square Back Cartridges – MR25 Series
- Round & Square Back Cartridges (full kit) – Model MR50/25
- Also Accommodates 37/43 ml. 2:1 Systems
- 75ml. 1:1 Plunger Rack for Square and Round Back Also Available
- Lightweight – Molded From Glass Reinforced ABS
- Easy Loading Breech – Secure Fit



## A25



- 25 ml. x 25 ml.
- Dedicated 1:1 Mix Ratio
- Available in 2:1 Mix Ratio for a 37/43 ml. System – Model A25/2
- Nominal Thrust 235 lbs.
- Easy Loading Breech
- True Adjustable Air Regulator – 75 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- All Component Replaceable Parts
- Air Hose Connector Included



## A50



- 50 ml. Cartridge Systems
- Square Back Cartridge Systems
- Dedicated 1:1/2:1 or 4:1/10:1 Mix Ratios (Must Specify)
- Nominal Thrust 157 lbs.
- True Adjustable Air Regulator – 50 PSI Maximum Output
- 145 PSI Maximum Input
- Silencer
- Instant Dump Valve
- All Component Replaceable Parts
- Air Hose Connector Included
- Available for S-Style Cartridge Systems – Model A50S



## M75



- 75 ml. x 75 ml.
- Stubby Cartridge System
- Mechanical Advantage 18:1
- Support Discs – Secure and Accurate Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Low-Medium Viscosity Materials
- All Component Replaceable Parts



## A75LP



- 75 ml. x 75 ml.
- Applicator for 75ml. Round Cartridge Systems Available – Model A75/1
- Nominal Thrust 484 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Support Discs – Secure and Accurate Cartridge Fit
- All Component Replaceable Parts
- Air Hose Connector Included



## M90



- 6 oz. Total System
- Dedicated 1:1 Mix Ratio
- Mechanical Advantage 18:1
- Support Strap – Secure Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Low-High Viscosity Materials
- All Component Replaceable Parts



## A90LP



- 6 oz. Total System
- Dedicated Mix Ratio 1:1
- Nominal Thrust 368 lbs.
- True Adjustable Air Regulator – 75 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Support Strap – Secure Cartridge Fit
- All Component Replaceable Parts
- Air Hose Connector Included



## M100



- Multi-Ratio Conversions:  
100 ml. x 100 ml.  
(Pre-configured Arrangement)  
100 ml. x 75 ml. (Kit Included)
- Mechanical Advantage 18:1
- Wear Compensating Device
- Low-Medium Viscosity Materials
- Support Strap – Secure Cartridge Fit
- Catch Plate – Sintered Steel
- All Component Replaceable Parts



## A100LP



- 100 ml. x 100 ml.
- Dedicated 1:1 Mix Ratio
- Nominal Thrust 484 lbs.
- Support Strap – Secure and Accurate Cartridge Fit
- Instant Dump Valve
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included



*Dual Component* 75 / 90 / 100 ml.



**M150LV**

- Multi-Ratio Conversions:  
150 ml. x 150 ml. (Pre-configured Arrangement)  
150 ml. x 75 ml. (Kit Available)
- Mechanical Advantage 12:1
- Support Strap – Secure Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Low Viscosity Materials
- All Component Replaceable Parts



**M150**



- Multi-Ratio Conversions:  
150 ml. x 150 ml. (Pre-configured Arrangement)  
150 ml. x 75 ml. (Kit Included)  
150 ml. x 100 ml. (Kit Included)
- Mechanical Advantage 18:1
- Support Strap – Secure Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Low-High Viscosity Materials
- All Component Replaceable Parts



**M150XL**

- Multi-Ratio Conversions:  
150 ml. x 150 ml. (Pre-configured Arrangement)  
150 ml. x 75 ml. (Kit Included)
- Mechanical Advantage 26:1
- Single Side Rails / Steel Plungers – Lighter Weight
- Support Strap - Secure Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



**A150LP**

Series 1

Series 3



- Dedicated Mix Ratio (Must Specify)  
150 ml. x 150 ml. (1:1 Mix Ratio) – Model A150LP/1 (Series 3 Air System Available)  
150 ml. x 75 ml. (2:1 Mix Ratio) – Model A150LP/2  
150 ml. x 100 ml. – Model A150LP/3
- Multi-Ratio Version (Does Not Have Reverse Air) – Model A150LP
- Multi-Ratio (Series 3) Version with Quick Change Plungers Available – Model A150LPMR-S3
- Nominal Thrust 484 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Support Strap – Secure Cartridge Fit
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included



**M180**

- 12 oz. Total System
- Dedicated 1:1 Mix Ratio
- Mechanical Advantage 18:1
- Support Straps – Secure Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Low-High Viscosity Materials
- All Component Replaceable Parts
- Pneumatic Version Available – Model A180LP (Special Order)



35%™ Dual Component 150 / 180 ml.

## M200



- 200 ml. x 200 ml.
- Dedicated 1:1 Mix Ratio
- Mechanical Advantage 18:1
- Wear Compensating Device
- Catch Plate – Sintered Steel
- Support Straps – Secure Cartridge Fit
- Low-High Viscosity Materials
- All Component Replaceable Parts



## M200X



- 200 ml. x 200 ml.
- Dedicated 1:1 Mix Ratio
- Mechanical Advantage 26:1
- Catch Plate – Sintered Steel
- Support Straps – Secure Cartridge Fit
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



## A200LP



- 200 ml. x 200 ml.
- Dedicated 1:1 Mix Ratio
- Nominal Thrust 484 lbs.
- Support Straps – Secure and Accurate Cartridge Fit
- Instant Dump Valve
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included




## M200LVMR



- 200 ml. Total System
- Multi-Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Twist & Lock Plunger System – Quick & Easy Ratio Changes
- Mechanical Advantage 12:1
- Side Loading Frame – Accurate Cartridge Placement
- Support Strap – Secure Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- Low Viscosity Materials
- All Component Replaceable Parts




## M200MR

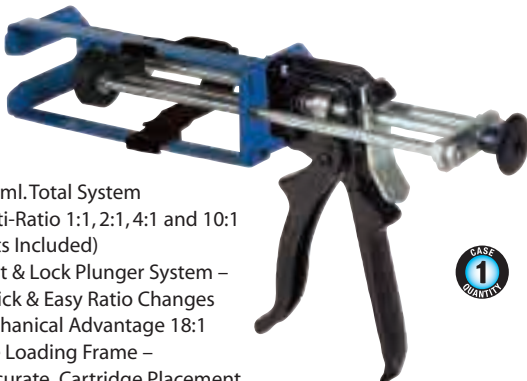

- 200 ml. Total System
- Multi-Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Twist & Lock Plunger System – Quick & Easy Ratio Changes
- Mechanical Advantage 18:1
- Side Loading Frame – Accurate Cartridge Placement
- Support Strap – Secure Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- Low Viscosity Materials
- All Component Replaceable Parts



## M200XMR

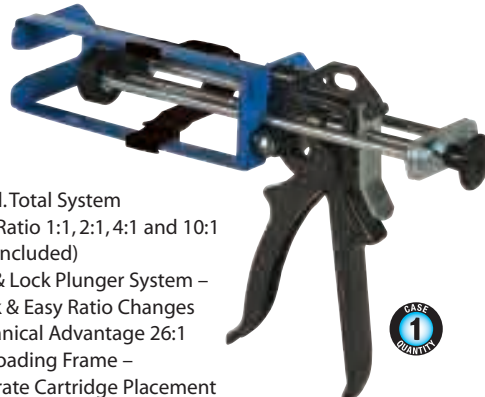

- 200 ml. Total System
- Multi-Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Twist & Lock Plunger System – Quick & Easy Ratio Changes
- Mechanical Advantage 26:1
- Side Loading Frame – Accurate Cartridge Placement
- Support Strap – Secure Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



*Dual Component*  
**200 ml.**

## A200LPMR



### Series 1

- 200 ml. Total System
- Multi-Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Twist & Lock Plunger System – Quick & Easy Ratio Changes
- Series 3 Air System Also Available
- Nominal Thrust 484 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Side Loading Frame – Accurate Cartridge Placement
- Support Strap – Secure Cartridge Fit
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included
- High Pressure Version Available – Model A200HPMR

### Series 3



## 81200



- 200 ml. Total System
- Multi-Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



## M265X

- 18 oz. Total System (265 ml. x 265 ml.)
- Dedicated 1:1 Mix Ratio
- Mechanical Advantage 26:1
- Catch Plate – Sintered Steel
- Support Strap – Secure Cartridge Fit
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



## M310

- Application of Dual 10 oz. Sausages or Cartridges (Must Specify)
- Mechanical Advantage 18:1
- Wear Compensating Device
- Patented Catch Plate (Sintered Steel)
- Low-High Viscosity Materials
- Includes Plastic Manifold Assembly
- All Component Replaceable Parts



## A310HP



- Application of Dual 10 oz. Sausage or Cartridge (Must Specify)
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included
- Includes Plastic Manifold Assembly



## M330



- 300 ml. x 30 ml.
- Dedicated Mix Ratio 10:1
- Mechanical Advantage 18:1
- Support Straps – Secure Cartridge Fit
- Wear Compensating Device
- Catch Plate – Sintered Steel
- All Component Replaceable Parts



## A330LP



- 300 ml. x 30 ml.
- Dedicated 10:1 Mix Ratio
- Nominal Thrust 484 lbs.
- Support Straps – Secure Cartridge Fit
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included
- Available for Side by Side 300ml. x 30ml. System – Model AP330LP
- 14.4 Volt Battery Version Available – Model 80330



## M300LV



- Multi-Ratio Conversions:
  - 300 ml. x 150 ml. (Pre-configured Arrangement)
  - 300 ml. x 300 ml. (Kit Included)
  - 300 ml. x 100 ml. (Kit Available)
- Mechanical Advantage 12:1
- Support Discs – Secure and Accurate Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- Low Viscosity Materials
- All Component Replaceable Parts



## M300



- Multi-Ratio Conversions:
  - 300 ml. x 300 ml. (Pre-configured Arrangement)
  - 300 ml. x 150 ml. (Kit Included)
  - 300 ml. x 100 ml. (Kit Available)
  - 300 ml. x 75 ml. (Kit Included)
  - 150 ml. x 150 ml. (Kit Available)
  - 150 ml. x 75 ml. (Kit Available)
- Mechanical Advantage 18:1
- Support Discs – Secure and Accurate Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- Low-High Viscosity Materials
- All Component Replaceable Parts



## M300XL



- Multi-Ratio Conversions:
  - 300 ml. x 300 ml. (Pre-configured Arrangement)
  - 300 ml. x 150 ml. (Kit Included)
  - 300 ml. x 75 ml. (Kit Included)
  - 300 ml. x 100 ml. (Kit Available)
  - 150 ml. x 150 ml. (Kit Available)
  - 150 ml. x 75 ml. (Kit Available)
- Mechanical Advantage 26:1
- Single Side Rails / Steel Plungers – Lighter Weight
- Support Discs – Secure and Accurate Cartridge Fit
- Catch Plate – Sintered Steel
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



## M300X



- Multi-Ratio Conversions:
  - 300 ml. x 300 ml. (Pre-configured Arrangement)
  - 300 ml. x 150 ml. (Kit Included)
  - 300 ml. x 100 ml. (Gun Available)
  - Model M300X/3
  - 300 ml. x 75 ml. (Kit Available)
- Mechanical Advantage 26:1
- Support Discs – Secure and Accurate Cartridge Fit
- Double Side Rails – Added Durability
- Catch Plate – Sintered Steel
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



*Dual Component* **300 / 330 ml.**



- Dedicated Mix Ratio (Must Specify)  
300 ml. x 300 ml. (1:1 Mix Ratio) – Model A300LP/1 (Series 3 Air System Available)  
300 ml. x 150 ml. (2:1 Mix Ratio) – Model A300LP/2  
300 ml. x 100 ml. (3:1 Mix Ratio – Does Not Have Reverse Air) – Model A300LP3  
300 ml. x 75 ml. (4:1 Mix Ratio) – Model A300LP/4
- Multi-Ratio Version (Does Not Have Reverse Air) Model A300LP
- Nominal Thrust 484 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Support Discs – Secure and Accurate Cartridge Fit
- Instant Dump Valve
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included



- Multi-Ratio Conversions:  
300 ml. x 300 ml.  
(Pre-configured Arrangement)  
300 ml. x 150 ml. (Kit Included)  
(Series 3 Air System Available)  
300 ml. x 75 ml. (Kit Included)
- Multi-Ratio (Series 3) Version with Quick Change Plungers Available – Model A300HPMR-S3
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Support Discs – Secure and Accurate Cartridge Fit
- Instant Dump Valve
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included



- 300 ml. x 300 ml.
- Dedicated 1:1 Mix Ratio
- Powered by 18V Lithium Battery Pack
- Dual Drive Rack Mechanism
- Maximum Force 1,349 lbs.
- Variable Speed Control
- Dosing Available
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



- Co-Axial Cartridge Systems
- Available in Mix Ratios 1:1, 2:1, 4:1 and 10:1 (Must Specify)
- Mechanical Advantage 18:1
- Wear Compensating Device
- Catch Plate – Sintered Steel
- All Component Replaceable Parts
- Mechanical Advantage 26:1 Variant Available – Model M380X (Special Order)



- Co-Axial Cartridge Systems
- Available in Mix Ratios of 1:1, 2:1, 4:1 and 10:1 (Must Specify)
- Series 3 Air System Available in 10:1 Mix Ratio
- Instant Dump Valve
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included
- 18V Cordless Variant Available – Model 81380



- 200 ml. and 400 ml. Total Systems
- Available in Mix Ratios of 1:1, 2:1, 4:1 and 10:1 (Must Specify)
- Full Kit Version Available
- Mechanical Advantage 26:1
- Side Loading Frame – Accurate Cartridge Placement
- Catch Plate – Sintered Steel
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts
- 18:1 Mechanical Advantage Version Available – Model M400MR



- 200 ml. and 400 ml. Total Systems
- Available in Mix Ratios of 1:1, 2:1, 4:1 and 10:1 (Must Specify)
- Series 3 Air System Available in all Variants
- Full Kit Version - Model A400LPMR
- Nominal Thrust 484 lbs.
- Side Loading Frame – Accurate Cartridge Placement
- Instant Dump Valve
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Reverse Air – Plunger Return with Trigger
- All Component Replaceable Parts
- Air Hose Connector Included
- High Pressure Version Available - Model A400HPMR (Series 3 Air System Also Available)



- 400 ml. Total System
- Multi Ratio 1:1, 2:1, 4:1 and 10:1 (Kits Included)
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



- 600 ml. x 600 ml. (Dedicated 1:1 Mix Ratio) Model M600X/1
- 600 ml. x 300 ml. (Dedicated 2:1 Mix Ratio) Model M600X/2
- 600 ml. x 150 ml. (Dedicated 4:1 Mix Ratio) Model M600X/4
- 600 ml. x 75 ml. (Dedicated 8:1 Mix Ratio) Model M600X/8
- Mechanical Advantage 26:1
- Catch Plate – Sintered Steel
- Support Discs – Secure and Accurate Cartridge Fit
- Wear Compensating Device
- High Viscosity Materials
- All Component Replaceable Parts



- 600 ml. x 300 ml. (Dedicated 2:1 Mix Ratio) Model A600HP/2 (Series 3 Air System Available)
- 600 ml. x 600 ml. (Dedicated 1:1 Mix Ratio) Model A600HP/1
- 600 ml. x 150 ml. (Dedicated 4:1 Mix Ratio) Model A600HP/4
- Multi-Ratio (Series 3) Version with Quick Change Plungers Available – Model A750HPMR-S3
- Nominal Thrust 1,188 lbs.
- Instant Dump Valve
- Support Discs – Secure and Accurate Cartridge Fit
- Reverse Air – Plunger Return with Trigger
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Air Hose Connector Included
- All Component Replaceable Parts
- 18V Dual Drive Version Available – Model 81600/2-D



- Application of Dual 20 oz. Sausage Packs
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Reverse Air – Plunger Return with Trigger
- Air Hose Connector Included
- All Component Replaceable Parts
- Includes Manifold Assembly
- Static Mixers Available

*Dual Component*

**400 / 600 ml.**

## M750X/1

- 750 ml. x 750 ml.
- Dedicated 1:1 Mix Ratio
- 750 ml. x 300 ml. (Gun Available) – Model M750X/2
- Multi Ratio (Gun Available) – Model M750X/kit
- Mechanical Advantage 26:1
- Wear Compensating Device
- High Viscosity Materials
- Catch Plate – Sintered Steel
- Support Discs – Secure and Accurate Cartridge Fit
- All Component Replaceable Parts



## M750X/10

- 750 ml. x 75 ml.
- Multi-Ratio Version Available – Model M750XMR
- Dedicated 10:1 Mix Ratio
- Mechanical Advantage 26:1
- Wear Compensating Device
- High Viscosity Materials
- Catch Plate – Sintered Steel
- Support Discs – Secure and Accurate Cartridge Fit
- All Component Replaceable Parts



## A750HP/1



Series 1

Series 3



- 750 ml. x 750 ml. (1:1 Mix Ratio - Preconfigured Arrangement) (Series 3 Air System Available)
- 750 ml. x 300 ml. (2:1 Mix Ratio) Model A750HP/2 (Kit Available)
- 750 ml. x 150 ml. (5:1 Mix Ratio) Model A750HP/5 (Kit Available)
- 750 ml. x 75 ml. (10:1 Mix Ratio) Model A750HP/10 (Series 3)
- Multi-Ratio (Series 3) Version with Quick Change Plungers Available – Model A750HPMR-S3
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Support Discs – Secure and Accurate Cartridge Fit
- Reverse Air – Plunger Return with Trigger
- Air Hose Connector Included
- All Component Replaceable Parts



## A750HP/10



Series 1

Series 3



- 750 ml. x 75 ml.
- Dedicated 10:1 Mix Ratio (Series 3 Air System Available)
- 750 ml. x 750 ml. (1:1 Mix Ratio) Model A750HP/1 (Series 3 Air System Available)
- 750 ml. x 300 ml. (2:1 Mix Ratio) Model A750HP/2
- 750 ml. x 150 ml. (5:1 Mix Ratio) Model A750HP/5
- Nominal Thrust 1,188 lbs.
- True Adjustable Air Regulator – 100 PSI Maximum Output
- 145 PSI Maximum Input
- Instant Dump Valve
- Support Discs – Secure and Accurate Cartridge Fit
- Reverse Air – Plunger Return with Trigger
- Air Hose Connector Included
- All Component Replaceable Parts



## 81750/1-D



- 750 ml. x 750 ml.
- Dedicated 1:1 Mix Ratio
- Powered by 18V Lithium Battery Pack
- Dual Drive Rack Mechanism
- Maximum Force 1,349 lbs.
- Variable Speed Control
- Dosing Available
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002



## 81750/10



- 750 ml. x 75 ml.
- Dedicated 10:1 Mix Ratio
- Powered by 18V Lithium Battery Pack
- Maximum Force 787 lbs.
- Variable Speed Control
- 30 Minute Fast Charge
- All Component Replaceable Parts
- Battery Charger and One Battery Included
- Battery Part #83001
- Charger Part #83002
- 18V Dual Drive Version Available – Model 81750/10-D





*Accessories*



Grey Plastic Nozzle  
**2N1001**



White Plastic Nozzle  
1/4"  
**2N1002**



Blue Plastic Nozzle  
3/8"  
**2N1003**



Red Plastic Nozzle  
1/2"  
**2N1004**



Black Plastic Nozzle  
injection  
**2N1005**



Static Mixer (For A600HPS Only)  
**3475-16** – 16 Element  
**3475-20** – 20 Element  
**3475-23** – 23 Element



Yellow Cone  
Plastic Nozzle  
**2N1006**



Black Cone  
Plastic Nozzle  
**2N1050**



White Cone  
Plastic Nozzle  
**2N1007**



Steel Nozzle  
3/8"  
**7N1001**



Steel Nozzle  
1/2"  
**7N1002**



Steel Nozzle  
3/4"  
**7N1003**

Static Mixer Extension  
**3475-EXT**



Plastic Nozzle Holder  
**2N1201**



Steel Nozzle Holder  
**7C1026**



Black Tuck Point Nozzle  
**2N1030**



Grey Grout Nozzle  
**2N1042**



4" Clamp with Nylon Pads (shown)  
**71004-P**

6" Clamp with Metal Pads  
**71006-M**

6" Clamp with Nylon Pads  
**71006-P**



**7XS053** – 190mm 2" Spreader Attachment

**7XS054** – 300mm 2" Spreader Attachment

**7XS055** – 400mm 2" Spreader Attachment

O'Ring  
**2S2008**  
(sold separately)



Support Handle  
**7XS041**



Easi-Clamps  
**72003**



Ultra-Clamps  
**72005**



Power-Clamps  
**72004**

Air Assist Spray  
Attachment  
**60020**



With Pressure  
Gauge  
**60021**



**2XP012** – 12V Carry Case  
(Single Component Only)

**2XP013** – 18V Carry Case  
(Single Component Only)

Inverter  
**AC-003**




**7F1015** – 2 Gallon Follower Plate

**7F1016** – 5 Gallon Follower Plate

**7F1022** – 2.5" 2 Gallon Follower Plate

**7F1023** 2.5" 5 Gallon Follower Plate



Aluminum Pull Handle/Hook  
**7H1001**



Caulk Warmer  
**AC-001**



Junior Caulk Warmer  
**AC-002**

12V Charger  
**82002-L**



18V Battery  
**83001**



18V Charger  
**83002**



12V Battery  
**82001-L**



Turbine Mixer  
**3M1201**

Sulzer Mixpac USA Inc. in Haslett, Michigan is the exclusive U.S. distributor of COX hand-held sealant and adhesive applicators. All products in the COX line are manufactured in-house at three locations: Newbury, England; West London, England; and Haslett, Michigan.

Sulzer Mixpac USA's distribution center in Michigan offers a wide range of in-stock products with on time delivery commitments, customer and technical service, and a parts and repair service center. Our sales team works to create and maintain a partnership with our customers, listening to their views and ideas to ensure that future development remains focused on providing a range of products optimally suited to their changing needs.

By combining innovative design with excellent manufacturing standards, rigid quality management, a competitive pricing policy and an in-depth understanding of the sealant and adhesive worldwide market, we have developed a range of manual, pneumatic and battery operated applicators to satisfy application needs from the do-it-yourself to the industrial to the most sophisticated specialist markets.

Quality of output is carefully monitored by a quality assurance system, stringently applied to incoming materials and components, in-house manufacturing and the finished product. It is the key to the company's reputation for producing consistently high quality products at attractive prices, and is the reason that the COX brand is considered number one in the world for sealant applicators.

**Warranty**

Sulzer Mixpac USA Inc. offers a one-year limited warranty from the date of purchase against defects in materials and workmanship on all COX branded products. Sulzer will repair or replace the product at our option, at no cost to the purchaser for labor, parts or return transportation, if it is delivered to us or your local COX dealer.

**Parts/Service**

In the event COX products fail to meet the warranty criteria, Sulzer Mixpac USA Inc. will submit a quotation to the purchaser on costs for parts and labor. A full parts and service department is located on-site to provide continued technical assistance and support.

**Schematics**

Due to our commitment of producing the highest quality products on the market, we are continuously making up-grades and improvements on our tools. In order to supply the most up-to-date schematics, they are available on-line at our website, [www.cox-applicators.com](http://www.cox-applicators.com).

# SULZER

# Applifast.



251 Cree Crescent, Winnipeg, MB Canada R3J 3X4  
Tel: 204 837 8361 • 1 800 563 1293  
info@applifast.com



[applifast.com](http://applifast.com)