

Cleco[®]
Production Tools

NeoTek[™]
High Torque
Corded Electric Nutrunners

THE NEW STANDARD IN HIGH TORQUE SOLUTIONS.



Designed to be the **New Standard in High Torque Solutions** covering a wide torque spectrum up to 4000 Nm.



Intelligent - Data logging with on board tool memory, preventative maintenance counter, internal temperature monitoring and fully configurable multifunction buttons and LED tool lights



Speed - 60% speed increase over the current Legacy series tools




Complexity Reduction - Shares 90% of parts with current 70 series NeoTek™ tools, reducing parts inventory



Ergonomic - Configurable high out put LED light ring with ergonomic handle

THE NEW STANDARD IN HIGH TORQUE SOLUTIONS.

Cleco's NeoTek™ 70 Series High Torque Corded Electric Nutrunners are engineered to provide superior performance, advance ergonomics, lower total cost of ownership and cost-effective tightening system solutions for demanding high-torque applications.

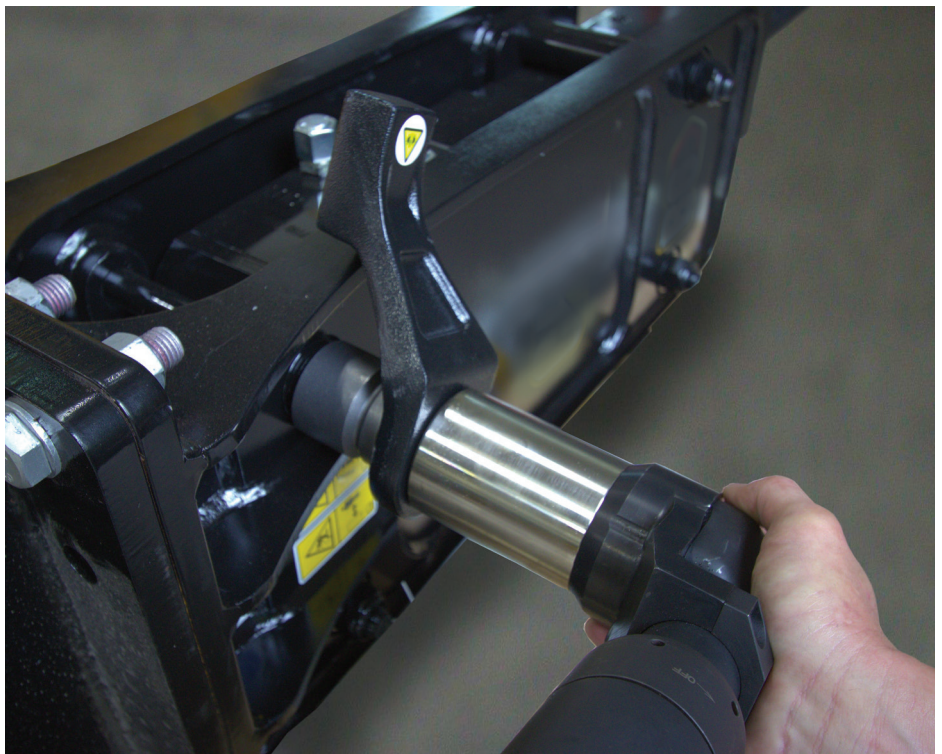

Repeatability & accuracy with 2.0 Cm/Cmk at +/- 7%



NEOTEK SWIVEL CABLE

| MODEL NUMBER | DESCRIPTION |
|--------------|------------------------------------|
| 961921-020 | TOOL CABLE, ANGLE SWIVEL, 2 METER |
| 961921-040 | TOOL CABLE, ANGLE SWIVEL, 4 METER |
| 961921-060 | TOOL CABLE, ANGLE SWIVEL, 6 METER |
| 961921-100 | TOOL CABLE, ANGLE SWIVEL, 10 METER |
| 961921-150 | TOOL CABLE, ANGLE SWIVEL, 15 METER |

60% faster

Digital communication for reliable performance
Internal temperature monitoring

Configurable LED light rings
Data logging with on-board tool memory
Preventive maintenance alerts

Configurable multi-function buttons

Non-contacting, long-lasting switches

Quarter-turn tool cable connection



Compatibility
Forward and backward compatibility with Cleco's entire Global cordless Controller platforms



THE NEW STANDARD IN HIGH TORQUE SOLUTIONS.

70 SERIES INLINE



| MODEL NUMBER | TORQUE RANGE NM | | TORQUE RANGE ft-lb | | SPEED r/min | WEIGHT | | LENGTH | | SIDE TO CENTER | | OUTPUT DRIVE |
|-----------------|--------------------|------|-----------------------|-------|----------------|--------|-------|--------|-------|----------------|------|------------------|
| | min | max | min | max | | kg | lb | mm | in | mm | in | |
| 70ESN95ND6 | 23 | 93 | 16.9 | 68.5 | 1325 | 5.20 | 11.46 | 566 | 22.28 | 33.1 | 1.30 | 3/4" Sq. Drive |
| 70ESN130ND6 | 31 | 124 | 22.8 | 91.4 | 1000 | 5.20 | 11.46 | 566 | 22.28 | 33.1 | 1.30 | 3/4" Sq. Drive |
| 70ESN185ND6 | 46 | 184 | 33.9 | 135.7 | 680 | 5.20 | 11.46 | 566 | 22.28 | 33.1 | 1.30 | 3/4" Sq. Drive |
| 70ESN245ND6 | 61 | 245 | 45.7 | 180.7 | 510 | 5.20 | 11.46 | 566 | 22.28 | 33.1 | 1.30 | 3/4" Sq. Drive |
| 70ESN355SD8 | 89 | 354 | 65.6 | 261.0 | 335 | 7.60 | 16.76 | 610 | 24.01 | 38.0 | 1.49 | 1" Sq. Drive |
| 70ESN475SD8 | 118 | 473 | 87.0 | 348.8 | 250 | 7.60 | 16.76 | 610 | 24.01 | 38.0 | 1.49 | 1" Sq. Drive |
| 70ESN700SD8 | 175 | 699 | 129.0 | 515.5 | 170 | 7.60 | 16.76 | 610 | 24.01 | 38.0 | 1.49 | 1" Sq. Drive |
| 70ESN850SD8 | 213 | 850 | 157.1 | 626.9 | 128 | 7.60 | 16.76 | 610 | 24.01 | 38.0 | 1.49 | 1" Sq. Drive |
| 70ESN1500TA8T | 425 | 1500 | 313 | 1106 | 43 | 8.7 | 19.2 | 621 | 24.4 | 41 | 1.6 | 1" Sq. Drive |
| 70ESN2000TA8T | 775 | 2000 | 572 | 1475 | 32 | 8.7 | 19.2 | 621 | 24.4 | 41 | 1.6 | 1" Sq. Drive |
| 70ESN4000UA12MT | 1250 | 4000 | 922 | 2950 | 18 | 12.8 | 28.3 | 615 | 24.2 | 60 | 2.3 | 1-1/2" Sq. Drive |

70 SERIES RIGHT ANGLE



| MODEL NUMBER | TORQUE RANGE NM | | TORQUE RANGE ft-lb | | SPEED r/min | WEIGHT | | LENGTH | | SIDE TO CENTER | | HEIGHT | | OUTPUT DRIVE |
|-----------------|--------------------|------|-----------------------|-------|----------------|--------|-------|--------|-------|----------------|------|--------|------|------------------|
| | min | max | min | max | | kg | lb | mm | in | mm | in | mm | in | |
| 70EAN155NA6 | 39 | 156 | 28.7 | 115.0 | 740 | 6.50 | 14.33 | 637 | 25.07 | 29.5 | 1.16 | 62 | 2.44 | 3/4" Sq. Drive |
| 70EAN205NA6 | 52 | 205 | 38.3 | 151.1 | 555 | 6.50 | 14.33 | 637 | 25.07 | 29.5 | 1.16 | 62 | 2.44 | 3/4" Sq. Drive |
| 70EAN240PA6 | 60 | 239 | 44.2 | 176.2 | 480 | 7.00 | 15.43 | 655 | 25.78 | 38.0 | 1.49 | 68 | 2.68 | 3/4" Sq. Drive |
| 70EAN350PA6 | 88 | 350 | 64.9 | 258.1 | 325 | 7.00 | 15.43 | 655 | 25.78 | 38.0 | 1.49 | 68 | 2.68 | 3/4" Sq. Drive |
| 70EAN600SA8T | 125 | 600 | 92 | 443 | 190 | 10.8 | 23.9 | 674 | 26.5 | 55 | 2.1 | 93 | 3.7 | 1" Sq. Drive |
| 70EAN800TA8MT | 200 | 800 | 148 | 590 | 115 | 11.6 | 25.5 | 659 | 25.9 | 42 | 1.6 | 205 | 8.1 | 1" Sq. Drive |
| 70EAN1500TA8MT | 375 | 1500 | 277 | 1106 | 60 | 11.6 | 25.5 | 659 | 25.9 | 42 | 1.6 | 205 | 8.1 | 1" Sq. Drive |
| 70EAN2000TB8MT | 500 | 2000 | 369 | 1475 | 35 | 14.7 | 32.4 | 677 | 26.6 | 58 | 2.3 | 231 | 9.1 | 1" Sq. Drive |
| 70EAN4000UA12MT | 1250 | 4000 | 922 | 2950 | 17 | 18.8 | 41.6 | 677 | 26.6 | 58 | 2.3 | 238 | 9.4 | 1-1/2" Sq. Drive |

400 SERIES CONTROLLERS



| MODEL NUMBER | DESCRIPTION | TOOL COMPATIBILITY | WEIGHT kg (lb) | WIDTH mm (in) | HEIGHT mm (in) | DEPTH mm (in) |
|---------------|-------------|--|-------------------|------------------|-------------------|------------------|
| mPro400GCD-P | Primary | NeoTek, LiveWire, CellCore, CellTek, I-Wrench, 18/48/17/47/67 Series | 13.7 (30.2) | 266.7 (10.5) | 381 (15) | 288 (11.34) |
| mPro400GCD-SH | Secondary | NeoTek, 18/48/17/47/67 Series | 12.8 (28.2) | 266.7 (10.5) | 381 (15) | 288 (11.34) |

300 SERIES CONTROLLER



| MODEL NUMBER | DESCRIPTION | TOOL COMPATIBILITY | WEIGHT kg (lb) | WIDTH mm (in) | HEIGHT mm (in) | DEPTH mm (in) |
|-----------------|----------------------|--------------------|-------------------|------------------|-------------------|------------------|
| mPro300GCD-NA | North America Region | NeoTek | 11.61 (25.6) | 142 (5.6) | 410 (16.1) | 297 (11.7) |
| mPro300GCD-EMEA | European Region | NeoTek | 11.61 (25.6) | 142 (5.6) | 410 (16.1) | 297 (11.7) |
| mPro300GCD-APAC | Asia Pacific Region | NeoTek | 11.61 (25.6) | 142 (5.6) | 410 (16.1) | 297 (11.7) |

TOOL CABLE - 30 / 50 / 70 SERIES



| MODEL NUMBER | LENGTH | | WEIGHT | |
|--------------|--------|------|--------|-----|
| | m | ft | kg | lb |
| 961560-030 | 3 | 9.9 | 0.79 | 1.7 |
| 961560-060 | 6 | 19.7 | 1.23 | 2.7 |
| 961560-080 | 8 | 26.3 | 1.52 | 3.4 |
| 961560-100 | 10 | 32.9 | 1.81 | 4.0 |

EXTENSION CABLE - 70 SERIES



| MODEL NUMBER | LENGTH | | WEIGHT | |
|--------------|--------|------|--------|------|
| | m | ft | kg | lb |
| 961923-050 | 5 | 16.5 | 1.79 | 3.9 |
| 961923-100 | 10 | 32.9 | 3.34 | 7.4 |
| 961923-150 | 15 | 49.4 | 4.89 | 10.8 |
| 961923-200 | 20 | 65.8 | 6.44 | 14.2 |
| 961923-250 | 25 | 82.3 | 7.99 | 17.6 |

Applifast.



251 Cree Crescent, Winnipeg, MB Canada R3J 3X4
Tel: 204 837 8361 • 1 800 563 1293
info@applifast.com



applifast.com