
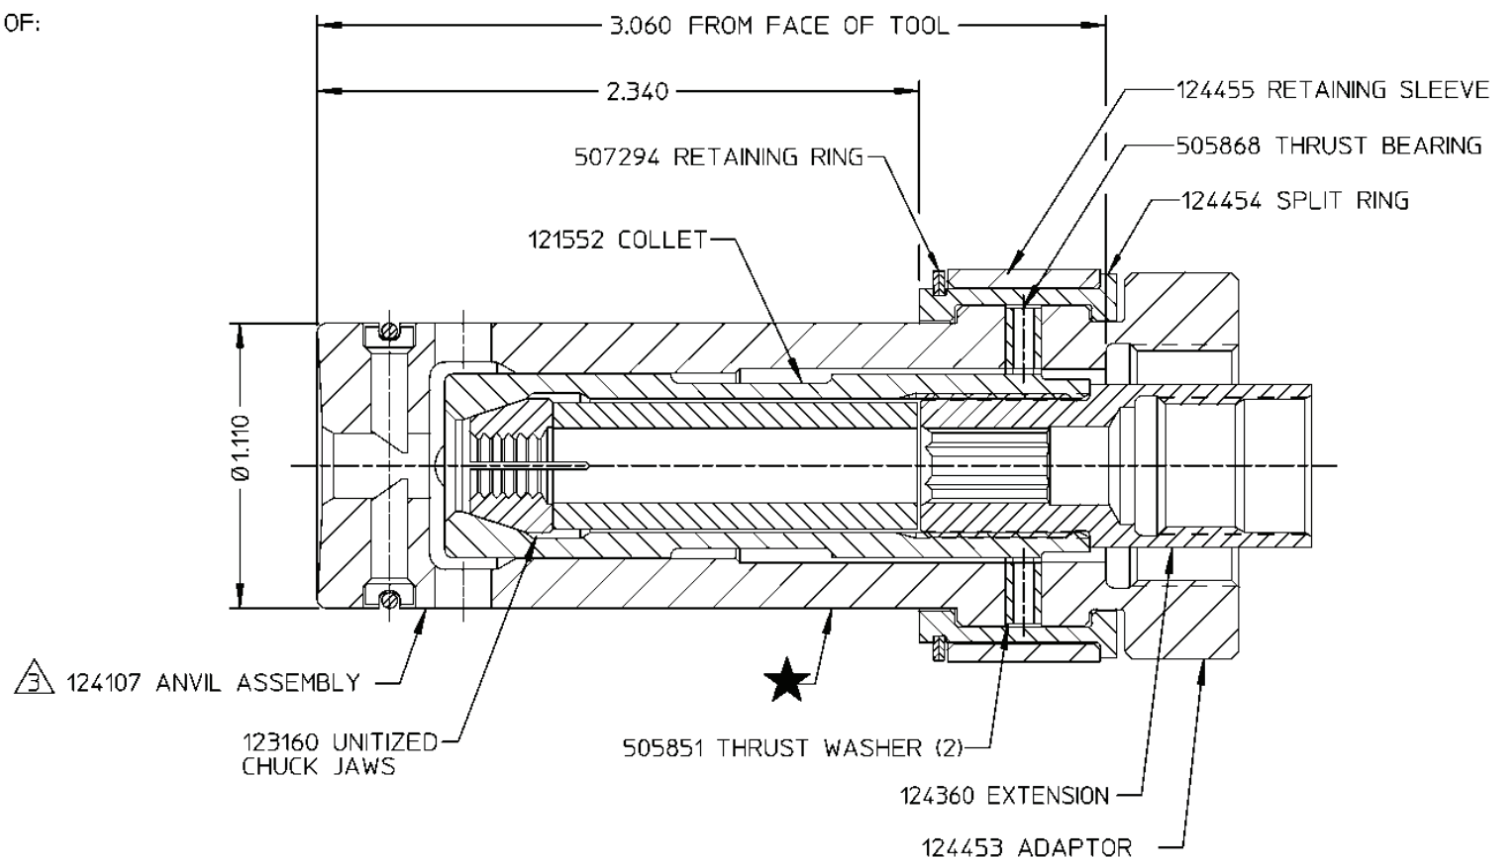


NOTES:

1 WHEN USED WITH 210 OR 212 TOOLS, USE WITH SHIM P/N 89140 (SHIPPED IN SEPARATE BAG).

2 TORQUE ALL THREADED JOINTS TO 28-32 FT/LBS

3 ANVIL ASSEMBLY 124107 CONSISTS OF:
124106 ANVIL
124105 RATCHET PIN (2)
507166 O-RING

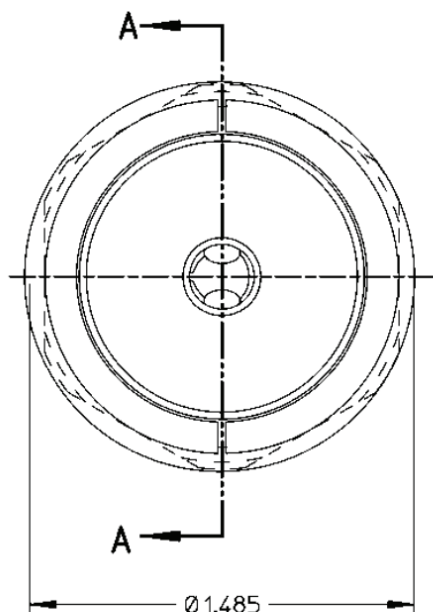

SECTION A-A

FORM: KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.		
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED: (ALL DIMENSIONS ARE IN INCHES)	HUCK INTERNATIONAL, INC., I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401
HARDNESS:	-	(RAW OR STOCKED STATE)		
HEAT TREAT TO:	-	SPEC:	.XX, .XXX ±	
SURFACE TREAT:	-	SPEC:	INT. COR. RADII	
SURFACE FINISH NOT TO EXCEED:	Ra		BREAK EDGES	DET: T.L. CK: DATE: 11-20-96 SCALE: 2/1
IDENTIFICATION PER SPEC 42-311: ★	ETCH		ANGLES ±	FOC. B
SURFACES TO BE	☉, //, ⊕, L, & ▽ WITHIN T.I.R.		FINAL ASSY: 212	FAC. 99-3464

Contact Applifast

Tel 204 837 8361 • 1 800 563 1293
info@applifast.com



applifast.com