



Accutec Torque

Precision Programmable Tools



- ✓ **OK/NOK Indicator**
- ✓ **Brushless Motor**
- ✓ **High Efficiency**
- ✓ **Simple Programming**
- ✓ **Low Maintenance Cost**
- ✓ **Cost Effective**

- ✓ **Excellent ergonomics, lightweight and compact design**
- ✓ **Maximum functionality operating concept**
- ✓ **Torque range from 0.5 Nm to 60 Nm**
- ✓ **Continuously adjustable speed**
- ✓ **Utmost process reliability**
- ✓ **Up to 7 configured steps**
- ✓ **Process-capable according to ISO5393, VDI/VDE 2647, cmk value >1.67 at ± 10% (Based on 6 Sigma)**


Cordless torque tools with mechanical shut-off clutch for accurate targeted torque.

FEIN AccuTec screwdrivers are specifically designed for the tough requirements of industrial volume production. They offer very high repeat accuracy, maximum precision and enormous flexibility. Continuously adjustable over a wide torque range, they can handle a wide range of different screwdriving applications.



| MODEL | MULTIVOLT INTERFACE | TORQUE RANGE | SPEED RPM | WEIGHT* | ANGLED HEAD |
|--|---------------------|--------------------------------|--------------|----------------------|-------------|
| Programmable Pistol Grip Screwdrivers | | | | | |
| ASM 18-3 PC | 12V-18V | 0.5-3 Nm 4.4-26.5 In. Lbs. | 110-1200 RPM | 0.80 kg 1.76 Lbs. | NA |
| ASM 18-8 PC | 12V-18V | 1-8 Nm 8.8-70.8 In. Lbs. | 110-1200 RPM | 0.80 kg 1.76 Lbs. | NA |
| ASM 18-12 PC | 12V-18V | 4-12 Nm 35.4-106.2 In. Lbs. | 80-900 RPM | 0.80 kg 1.76 Lbs. | NA |
| Programmable Right Angle Nutrunners | | | | | |
| ASW 18-6 PC | 12V-18V | 1.2-6 Nm 0.8-4.4 Ft. Lbs. | 100-1340 RPM | 1.00 kg 2.20 Lbs. | ① ② ③ |
| ASW 18-12 PC | 12V-18V | 3-12 Nm 2.2-8.8 Ft. Lbs. | 75-1020 RPM | 1.00 kg 2.20 Lbs. | ① ② ③ |
| ASW 18-18 PC | 12V-18V | 6-18 Nm 4.4-13.2 Ft. Lbs. | 65-900 RPM | 1.20 kg 2.64 Lbs. | ⑥ |
| ASW 18-30 PC | 18V | 12-30 Nm 8.8-22.1 Ft. Lbs. | 30-420 RPM | 1.50 kg 3.31 Lbs. | ④ ⑤ |
| ASW 18-45 PC | 18V | 20-45 Nm 14.7-33.1 Ft. Lbs. | 25-310 RPM | 1.65 kg 3.64 Lbs. | ④ ⑤ |
| ASW 18-60 PC | 18V | 25-60 Nm 18.4-44.2 Ft. Lbs. | 20-230 RPM | 1.65 kg 3.64 Lbs. | ⑤ |

*Without Battery



HEAD OFFICE
251 Cree Crescent
Winnipeg, MB
R3J 3X4 Canada

WESTERN CANADA
2004 Sherwood Drive
Sherwood Park, AB
T8A 0Z1 Canada

EASTERN CANADA
Unit 5 - 1249 Seagrave Road
Woodstock, ON
N4T 0A8 Canada







Tel: 1 800 563 1293
info@applifast.com




applifast.com




The individual tightening behaviour can be set precisely for every screw-driving situation, in up to seven programme steps, using freely programmable parameters such as the angle of rotation, time, torque threshold, speed and direction of rotation.


| IMAGE | FEIN ANGLE HEAD | COMPATIBLE WITH |
|-----------------------------------|---|---------------------------|
| Accessories For The ASW 18 | | |
| 1 |  Fein Quick-In 1/4" Hex Socket Drive Angle Head Assembly | ASW 18-6 PC/ASW 18-12 PC |
| 2 |  Fein 3/8" Square Drive Angle Head Assembly | ASW 18-6 PC/ASW 18-12 PC |
| 3 |  Fein 1/4" Square Drive Angle Head Assembly | ASW 18-6 PC/ASW 18-12 PC |
| 4 |  Fein 3/8" Square Drive Angle Head Assembly | ASW 18-30 PC/ASW 18-45 PC |
| 5 |  Fein 1/2" Square Drive Angle Head Assembly | ASW 18-60 PC |
| 6 |  Fein 3/8" Square Drive Angle Head Assembly | ASW 18-18 PC |

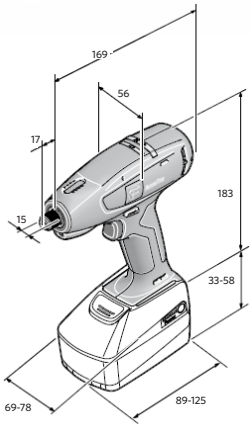


ASM 18-3 PC
ASM 18-8 PC
ASM 18-12 PC




ASW 18-6 PC
ASW 18-12 PC



ASW 18-18 PC



ASW 18-30 PC
ASW 18-45 PC



ASW 18-60 PC

Applifast can provide the basic training for software programming and correct use of Fein Accutec Programmable Torque Tools at your facility.

Improve Your Quality of Fastening Today

HEAD OFFICE
251 Cree Crescent
Winnipeg, MB
R3J 3X4 Canada

WESTERN CANADA
2004 Sherwood Drive
Sherwood Park, AB
T8A 0Z1 Canada

EASTERN CANADA
Unit 5 - 1249 Seagrave Road
Woodstock, ON
N4T 0A8 Canada

Tel: 1 800 563 1293
info@applifast.com



applifast.com