

Desoutter**Industrial**Tools**KA26**

Angle Grinder / Sander
Power and Precision

Comprehensive Range
Efficiency & Modularity
Easy to use Easy to Maintain

More Than Productivity



PRODUCTIVITY

Powering you to greater efficiency



ROLLING
STOCK



USER

*Developed with our input,
the tool is a perfect match
for our needs*



WIND
ENERGY



SAFETY MANAGER



*These tools have all key ergonomic features covered.
This has decreased the operation downtime,
and we have a motivated workforce*



OFF ROAD
VEHICLES

MAINTENANCE ENGINEER



*Very easy to maintain, Desoutter grinders
make my life easier with parts in stock,
great technical support and quick
assembly / disassembly time.*



MILITARY VEHICLES

INDUSTRIAL STRENGTH

Maximum comfort

- Angled handle designed to ease holding position (straight wrist)
- Free from air exhaust

Best productivity in its class


High power 2100W (2.82 hp)

Ergonomic Lever

Streamlined design to facilitate one-handed grasp

Multi-position exhaust

To improve operator comfort

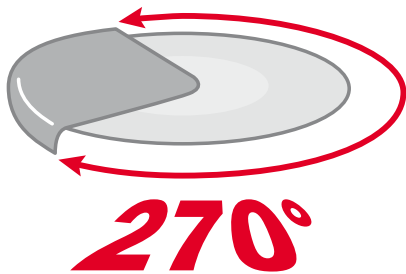

Multi-position grinding

The 270° Multi-position guard provides maximum protection and comfort

Fast disc change

One-key disc changing with spindle lock button






Optimum Accessibility
lowest height over spindle



Low vibration for minimum stress and longer use :

- Damping and multi-position side handle
- Autobalancer

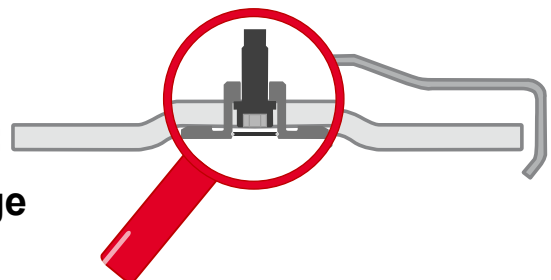

A smart, flush designed flange
Compact attachment
protecting the safety screw

Technical Data



PIC REF	MODEL	PART NUMBER	FREE SPEED	WHEEL / PAD / COLLET		THREADED SPINDLE	POWER		WEIGHT		AIR CONSUMPTION				AIR INLET THREAD	HOSE INT. Ø		Anti vibration side handle	Dust Extraction 7"	Diamond disc cutter 7"	Auto- balan- cing
				MAX CAPACITY			W	hp	kg	lb.	l/s	cfm	l/s	cfm		in.	mm				
			rpm	mm	in.	in.	W	hp	kg	lb.	l/s	cfm	l/s	cfm	in.	mm	in.				

ANGLE GRINDERS

A	KA26085B7V	615 170 476 0	8500	180x9.5x22.2	7x3/8x7/8	5/8-11 UNC	2100	2.82	2.7	5.9	17	36	36	77	1/2	15	5/8	✓	✗	✗	✓
A	KA26085H7V	615 170 489 0	8500	180x9.5x22.2	7x3/8x7/8	HEX.	2100	2.82	2.7	5.9	17	36	36	77	1/2	15	5/8	✓	✗	✗	✓
B	KA26065B9V	615 170 477 0	6500	230x6.4x22.2	9x1/4x7/8	5/8-11 UNC	2100	2.82	2.9	6.4	21	44	38	80	1/2	15	5/8	✓	✗	✗	✓
B	KA26065H9V	615 170 490 0	6500	230x6.4x22.2	9x1/4x7/8	HEX.	2100	2.82	2.9	6.4	21	44	38	80	1/2	15	5/8	✓	✗	✗	✓
E	KA26077B7Y	615 170 478 0	7700	180x9.5x22.2	7x3/8x7/8	5/8-11 UNC	2100	2.82	3.0	6.6	16	33	32	69	1/2	15	5/8	✓	✗	✗	Opt.

ANGLE SANDERS

C	KA26085BV	615 170 479 0	8500	180	7	5/8-11 UNC	2100	2.82	2.3	5.1	17	36	36	77	1/2	15	5/8	✓	Opt	Opt	✓
C	KA26077BY	615 170 481 0	7700	180	7	5/8-11 UNC	2100	2.82	2.3	5.1	16	33	32	69	1/2	15	5/8	✓	Opt	Opt	✗
D	KA26065BV	615 170 480 0	6500	180 - 230	7 - 9	5/8-11 UNC	2100	2.82	2.3	5.1	21	44	38	80	1/2	15	5/8	✓	Opt	Opt	✓
D	KA26060BY	615 170 482 0	6000	180 - 230	7 - 9	5/8-11 UNC	2100	2.82	2.3	5.1	18	38	37	77	1/2	15	5/8	✓	Opt	Opt	✗

Products and applications



DUST EXTRACTION KIT KA26 CUTTING
615 397 844 0



DUST EXTRACTION KIT KA26 Ø180mm
615 397 843 0

DIAMOND DISC CUTTER Ø180mm
615 811 145 0



Tool Range



More Than Productivity

Applifast.



251 Cree Crescent, Winnipeg, MB Canada R3J 3X4
Tel: 204 837 8361 • 1 800 563 1293
info@applifast.com



applifast.com